

Technical Specification



Diesel
Generator Set
KD 640 O&M

3 YEARS OR
3000 HOURS
WARRANTY



Description

This Katana® Power Generation commercial generator set is a fully integrated power generation system, providing optimum performance, reliability, and versatility for stationary standby, prime power and continuous duty applications.

Features

Katana® heavy-duty engine - Rugged 4-cycle industrial diesel delivers reliable power, low emissions and fast response to load changes.

Alternator - Low reactance 2/3 pitch windings; low waveform distortion with non- linear loads, fault clearing short-circuits capability, and class H insulation.

Cooling system - The standart integrated kit model radiator system designed and tested for nominal ambient temperatures, simplifres facility design requirements for heat rejected.

Control system – Datakom electronic control is standard equipment and provides total genset system integration, including auto remote start/stop, alarm and status message display.

Canopy Types - Optionally it is possible to make it protective and soundproof against adverse climatic conditions

Warranty and service - Backed by a comprehensive warranty and worldwide aftersales support, 10 years of spare parts supplying.

Stand by Rating (ESP): It is the way that generators operate under variable load at certaintime intervals. It can work as a backup power.It is not suitable to work under extreme load.

Prime Rating (PRP): Applicable for supplying power to varying electrical load for unlimited hours. PRP is in accordance with ISO 8528. 10 % overload capability is available for a period of 1 hour within 12-hour perod of operation,in accordance with ISO 3046.

| Genset Model | Engine Model | Prime | Stand by | Overload |
|--------------|--------------|---------|----------|----------|
| KD 640 O&M | WY510TLD | 527 kVA | 580 kVA | 638 kVA |

Generator Set Specifications

| | |
|--|--|
| Governor regulation class | ISO 8528 G3 |
| Voltage regulation, no load to full load | ± 1% |
| Random voltage variation | ± 1% |
| Frequency regulation | Isochronous |
| Random frequency variation | ± 0.25% |
| EMS compatibility | In compliance with BS 800 and VDE levels G and N |

Engine Specifications

| | |
|--|------------------------------|
| Engine brand | Optimus Engine |
| Aspiration Type | Turbocharged with in ercoole |
| Engine Rated Speed | 1500 rpm |
| Bore | 135 mm |
| Stroke | 150 mm |
| Displacement | 25,8 L |
| Cylinder block | 12 cylinder |
| Type | V type |
| Idle speed(rpm) | 700 |
| Starting voltage | 24 V |
| Fuel system | Direct injection |
| Fuel filter | Strata pore fuel filter |
| Air cleaner type | Heavy duty air cleaner |
| Compression ratio | 17:1 |
| Cycle | 4 stroke |
| Cooling system | Water cooled |
| Governor Type | Electronic |
| Fuel Consumption at 50% of generator set prime output | 66,05 L/hr |
| Fuel Consumption at 75% of generator set prime output | 99,08 L/hr |
| Fuel Consumption at 100% of generator set prime output | 132,10 L/hr |
| Fuel Consumption(g/kw.h) | ≤220 |

Alternator Specifications

| | |
|--|--|
| Alternator brand | Megatron |
| Type | Brushless, revolving field |
| Frequency | 50 Hz |
| Winding pitch | 2/3 pitch |
| Number of bearing | Single bearing |
| Protection | IP23 |
| Insulation system | Class H |
| Standard temperature rise | Standart 125°C ,Stand by 163°C |
| Exciter type | Self - excitation or other excitation by PMG |
| Phase rotation | A (U), B (V), C (W) |
| Alternator cooling | Direct drive centrifugal blower fan |
| AC waveform total harmonic distortion (THDV) | No load <1.5%. Non distorting balanced linear load <5% |
| Telephone influence factor (TIF) | <50% per NEMA MG1-22.43 |
| Telephone harmonic factor (THF) | <2% |

Generator Set Options

Engine

- ☐ Water jacket heater

Cooling

- ☐ Antifreeze -25°

Alternator

- ☐ H class insulation
☐ Exciter voltage regulator

Control panel

- ☐ Datakom
☐ 3 pole main circuit breaker
Motorised 4 pole circuit breaker

Canopy Types

- ☐ Optional super silent

Warranty

- ☐ 3000 working hours or 3 years warranty

Control system

The new D500 MK2 genset controller is a cost effective modular genset controller ready for internet monitoring through plug-in modules.

Its main advantages are multifunctionality, support for multiple topologies, harmonic analysis and detailed power measurements.

Description

Software features are complete with easy firmware upgrade through USB port.

The Windows based PC software allows monitoring and programming through USB, RS-485, RS-232, Ethernet and GPRS.

The Rainbow Scada web service allows monitoring and control of an unlimited number of gensets from a single central location

Major features

- Diesel and gas genset support
- 400 Hz operation support
- 400 event logs, full snapshot
- All parameters front panel editable
- 3 level configuration password
- 128x64 graphical LCD display
- Downloadable languages
- Waveform display of V & I
- Harmonic analysis of V & I
- 16Amp MCB & GCB outputs
- 8 configurable digital inputs
- 6 configurable digital outputs
- 3 configurable analog inputs
- Both CANBUS-J1939 & MPU
- 3 configurable service alarms
- Multiple automatic exerciser
- Weekly operation schedule
- Dual mutual standby with equal aging of gensets
- Manual "speed fine adjust" on selected ECUs
- Automatic fuel pump control
- Disable protections feature
- Excess power protection
- Reverse power protection
- Overload IDMT protection
- Load shedding, dummy load
- Multiple load management
- Current unbalance protection
- Voltage unbalance protection
- Fuel filling & fuel theft alarms
- Battery back-up real time clock
- Idle speed control
- Battery charge run enabled
- Combat mode support
- Multiple nominal conditions
- Contactor & MCB drive
- 4 quadrant genset power counters
- Mains power counters
- Fuel filling counter
- Fuel consumption counter
- Modem diagnostics display
- Configurable through USB, RS-232 and GPRS
- Free configuration program
- Allows SMS controls

- Ready for central monitoring
- Mobile genset support
- Automatic GSM geo-location
- GPS connectivity (RS232)
- Easy USB firmware upgrade
- IP65 rating with optional gasket

Functions


- AMF unit
- ATS unit
- Remote Start Controller
- Manual Start Controller
- Engine Controller
- Remote Display Panel

Communications

- USB Device
- J1939-CANBUS
- Geo-locating through GSM
- Internet Central Monitoring
- SMS Message Sending
- E-mail Sending
- Free Pc Software: RainbowPlus
- Modbus RTU (2400-57600baud)
- Modbus TCP/IP
- HTML
- UDP

Remote monitoring

- Single server supports up to 60'000 devices
- Provides data security, data is sent to only server
- Uses internet-based interactive World map
- Real time display of status of devices are shown on the map, and on side panel
- Hierarchical configuration and clustering
- Remote control of devices
- Supports all Datakom products, which are integrated with DKG 210 gateway
- Supports all devices, which supports Modbus protocol, by integrating DKG 210 gateway
- Data recording, analysis and reporting
- Tablet and smartphone interfaces

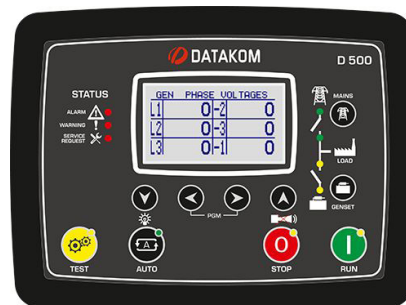


D-500 MK2 control operator / display panel


Canopy Standart Specifications

- Compact design connection with non-welded nuts and bolts.
- Integrated canopy, generator set, exhaust system fuel tank.
- Body made from steel components treated with polyester powder coating
- Easy access to all service points
- Exhaust system inside canopy
- Large doors on each side
- Control panel viewing window in a lockable access door
- Emergency stop push button mounted on cabin exterior
- Fuel fill and battery can only be reached via lockable access doors.
- Customer options available to meet your applications needs.
- Katana makes its generating sets noise level tests in accordance with directive 2000/14/EC validation of the noise level test has been aproved by the notified body Szutest (CE conformity assessment body).

Open

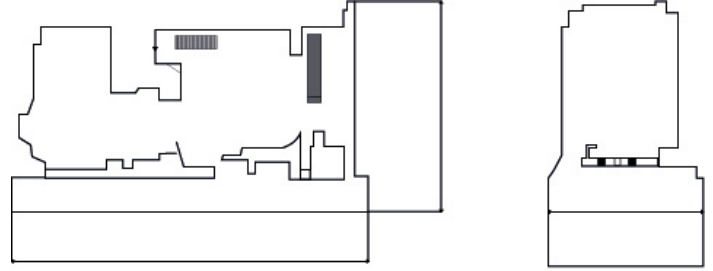

Enclosed

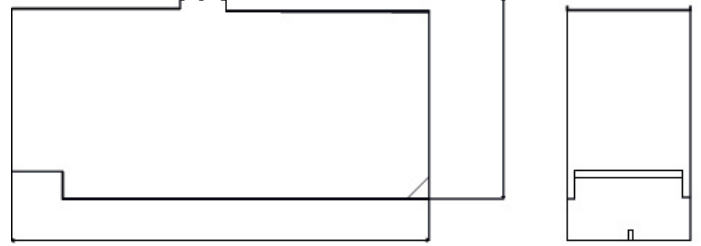

| | Dry Weight (kg) | Lenght (mm) | Width (mm) | Height (mm) | Tank Capacity (L) |
|------------------|-----------------|-------------|------------|-------------|-------------------|
| Open type | 3660 | 5150 | 2000 | 2900 | 1200 |
| Canopy | 4210 | 5150 | 2000 | 3550 | 1200 |

Certificates



Katana Generator has Quality Management Systems certificate. ISO 9001:2015



Katana Generator has Occupational Health and Safety Management Systems certificate. ISO 45001: 2018



Katana Generator has Environmental Management System certification. ISO 14001:2015



This generator set is available with CE certification.

Katana Power Products Katana Güç Ürünleri San. Tic. Ltd. Şti.

Adress : Gebze Güzeller Organize Sanayi Bolgesi
Yunus Emre Sok. No :3
Gebze / KOCAELI / TURKEY
Telephone: 444 5 978
+90 262 502 10 90
Faks : +90 262 502 10 77
E Mail : katana@katana.com.tr



www.katana.com.tr